



LEVERAGE RATIO

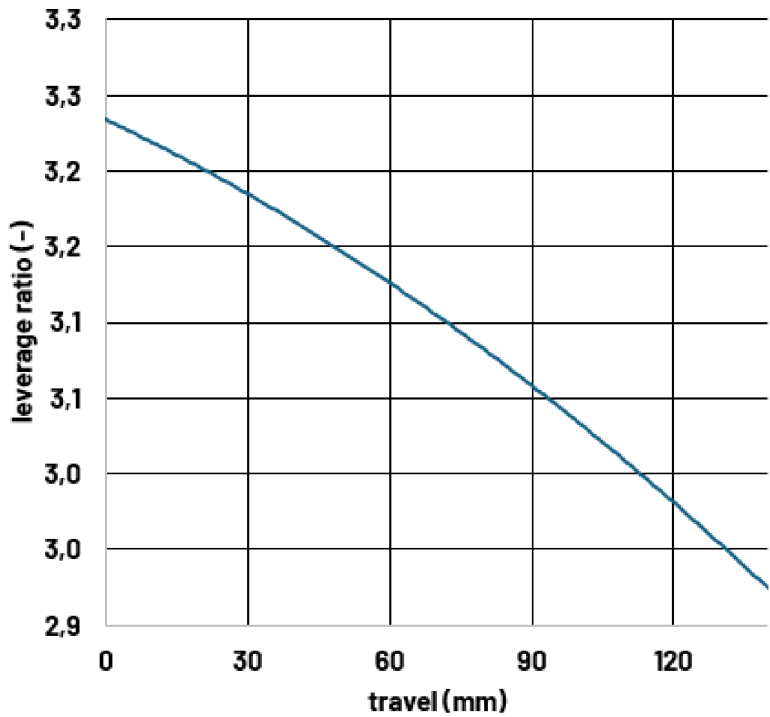

Standards

BB standard	BSA 73 mm
Max. fork travel	26": 140 mm 24": 130 mm
Shock length	165 mm
Shock stroke	26": 45 mm 24": 42.5 mm
Shock mount top	Trunnion
Shock mount bottom	25 mm
Rear wheel travel	26": 140 mm 24": 130 mm
Brake mount	Post mount 180 mm
Seat post diameter	31.6 mm
Seat clamp diameter	34.9 mm
Head set (S.H.I.S)	Top: IS42 / Bottom: IS52
Rear wheel axle	x12 (148mm-Boost)
Rear hub width	148 mm (Boost)
Chain line	52 mm (Boost)
Chain guide mount	ISCG 05 (Boost)
Tire size front	26" 24"
Tire size rear	26" 24"

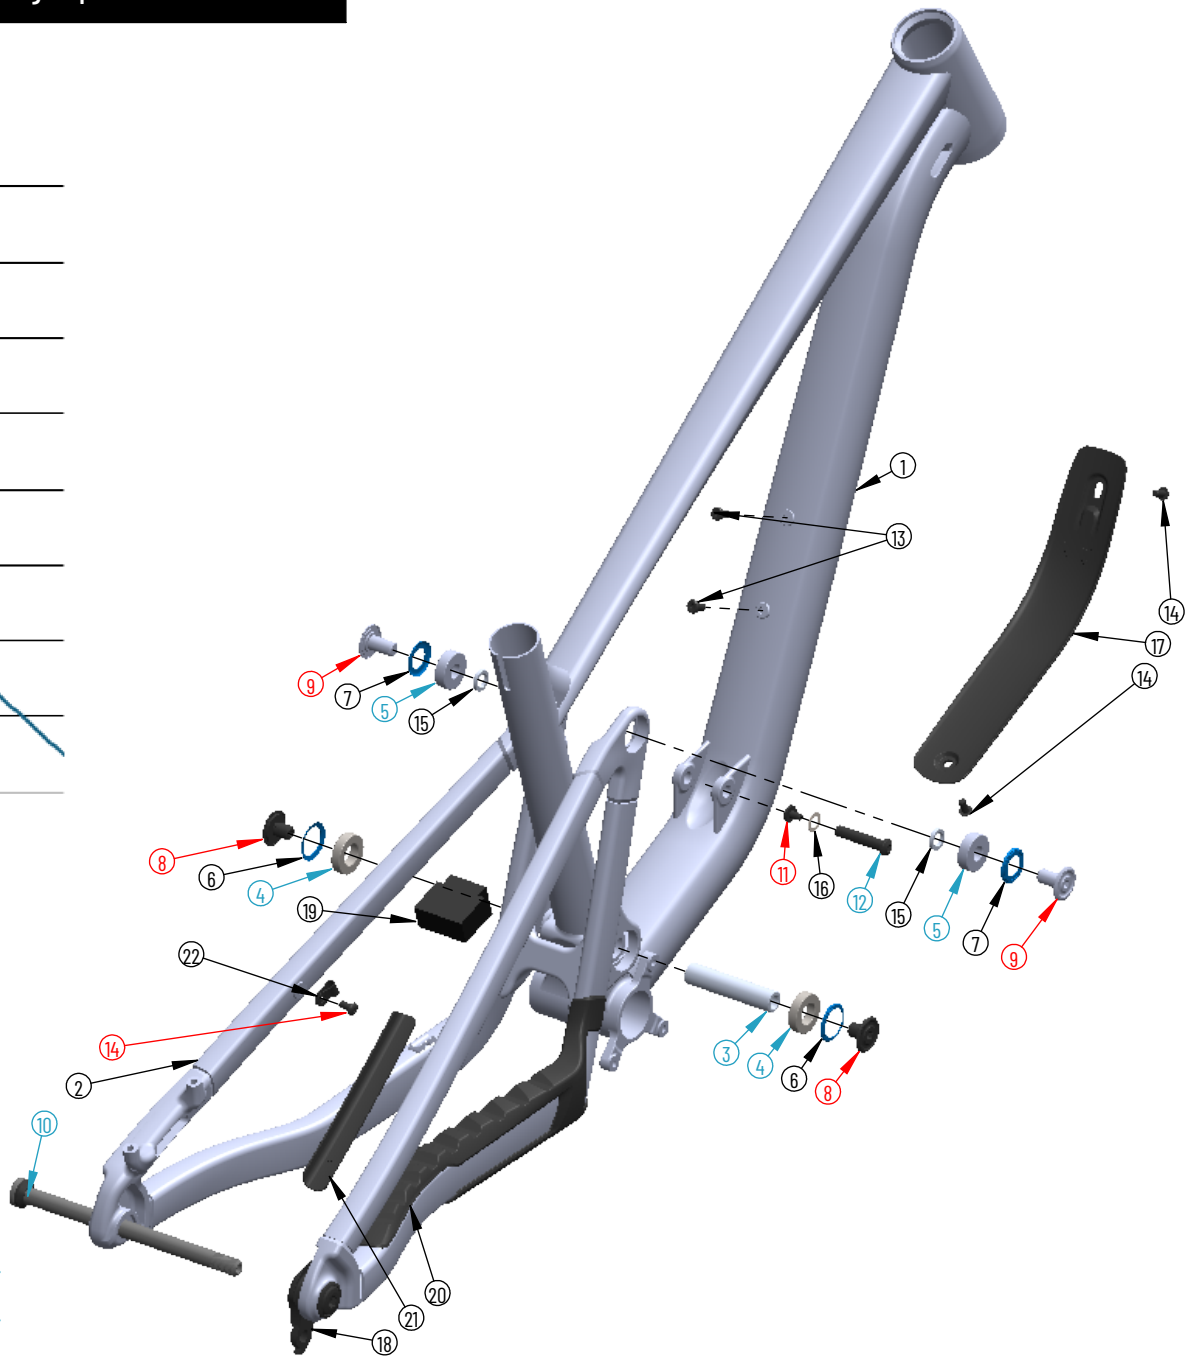

○ Add Loctite 243 on thread

○ Add Grease

Item No.	Part No.	Part name	Qty.	Torque
1	002466	Front_triangle	1	
2	002477	Rear_triangle	1	
3	000659	Axle	1	
4	000006	Bearing_15x28x7_NoS61902-2RS	2	
5	000565	Bearing_10x26x8	2	
6	000602	Dust_cap_seal	2	
7	001385	Dust_cap_seal	2	
8	000600	15mm_Axle_Cap	2	15 Nm
9	001346	Bolt_M10x18custom	2	15 Nm
10	001284	Propain_Sixpack_X12_axle_UDH	1	12 Nm
11	002487	Bolt	1	6 Nm
12	002486	Bolt	1	6 Nm
13	002317	Bolt_M5x12custom	2	6 Nm
14	000055	Bolt_M5x10_roundhead	3	6 Nm
15	000576	Washer	2	
16	001736	Washer 8x14x0.5 DIN988	1	
17	002488	DT_protector	1	
18	001739	UDH hanger	1	20 Nm
19	002515	moto foam	1	
20	002492	CS_protector	1	
21	002514	SS_protector	1	
22	001713	Action cable base	1	