


TYEE 6.1 CF


Exploded Drawing - Spare Parts - Standards

LEVERAGE RATIO

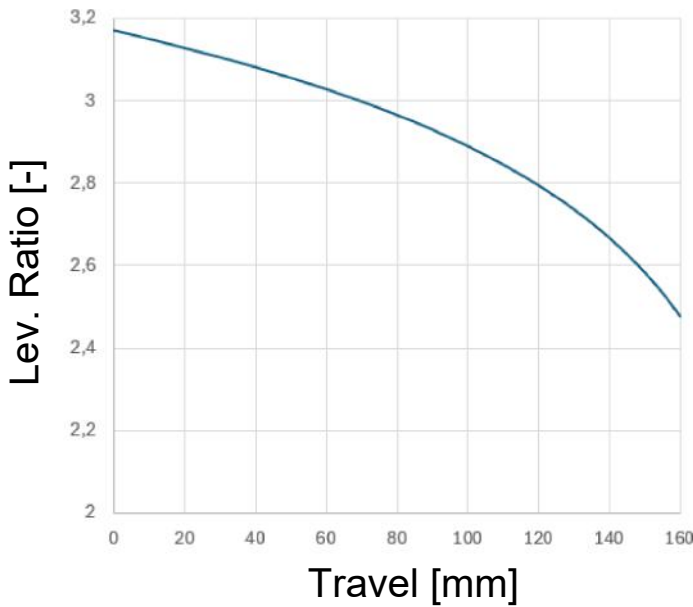

Standards

Max. fork length (axle to crown)	29"/Mix: 586 mm 27.5": 567 mm
Max. Fork travel	170 mm
Shock length	210 mm
Shock stroke	55 mm
Shock mount top	8x30 mm
Shock mount bottom	8x30 mm
Rear wheel travel	160 mm
Brake mount	Post mount 200 mm
Bottom Bracket	BSA 73 mm
Seat post diameter	31.6 mm
Seat clamp diameter	36.4 mm
Head set (S.H.I.S)	Top: ZS56 / Bottom: ZS56
Rear wheel axle	x12 (UDH 148mm-Boost)
Rear hub width	148 mm (Boost)
Chain line	52-55 mm (Boost)
Chain guide mount	ISCG 05 (Boost)
Tire sizes	27.5" / MIX / 29"
Hanger	UDH / SRAM Transmission

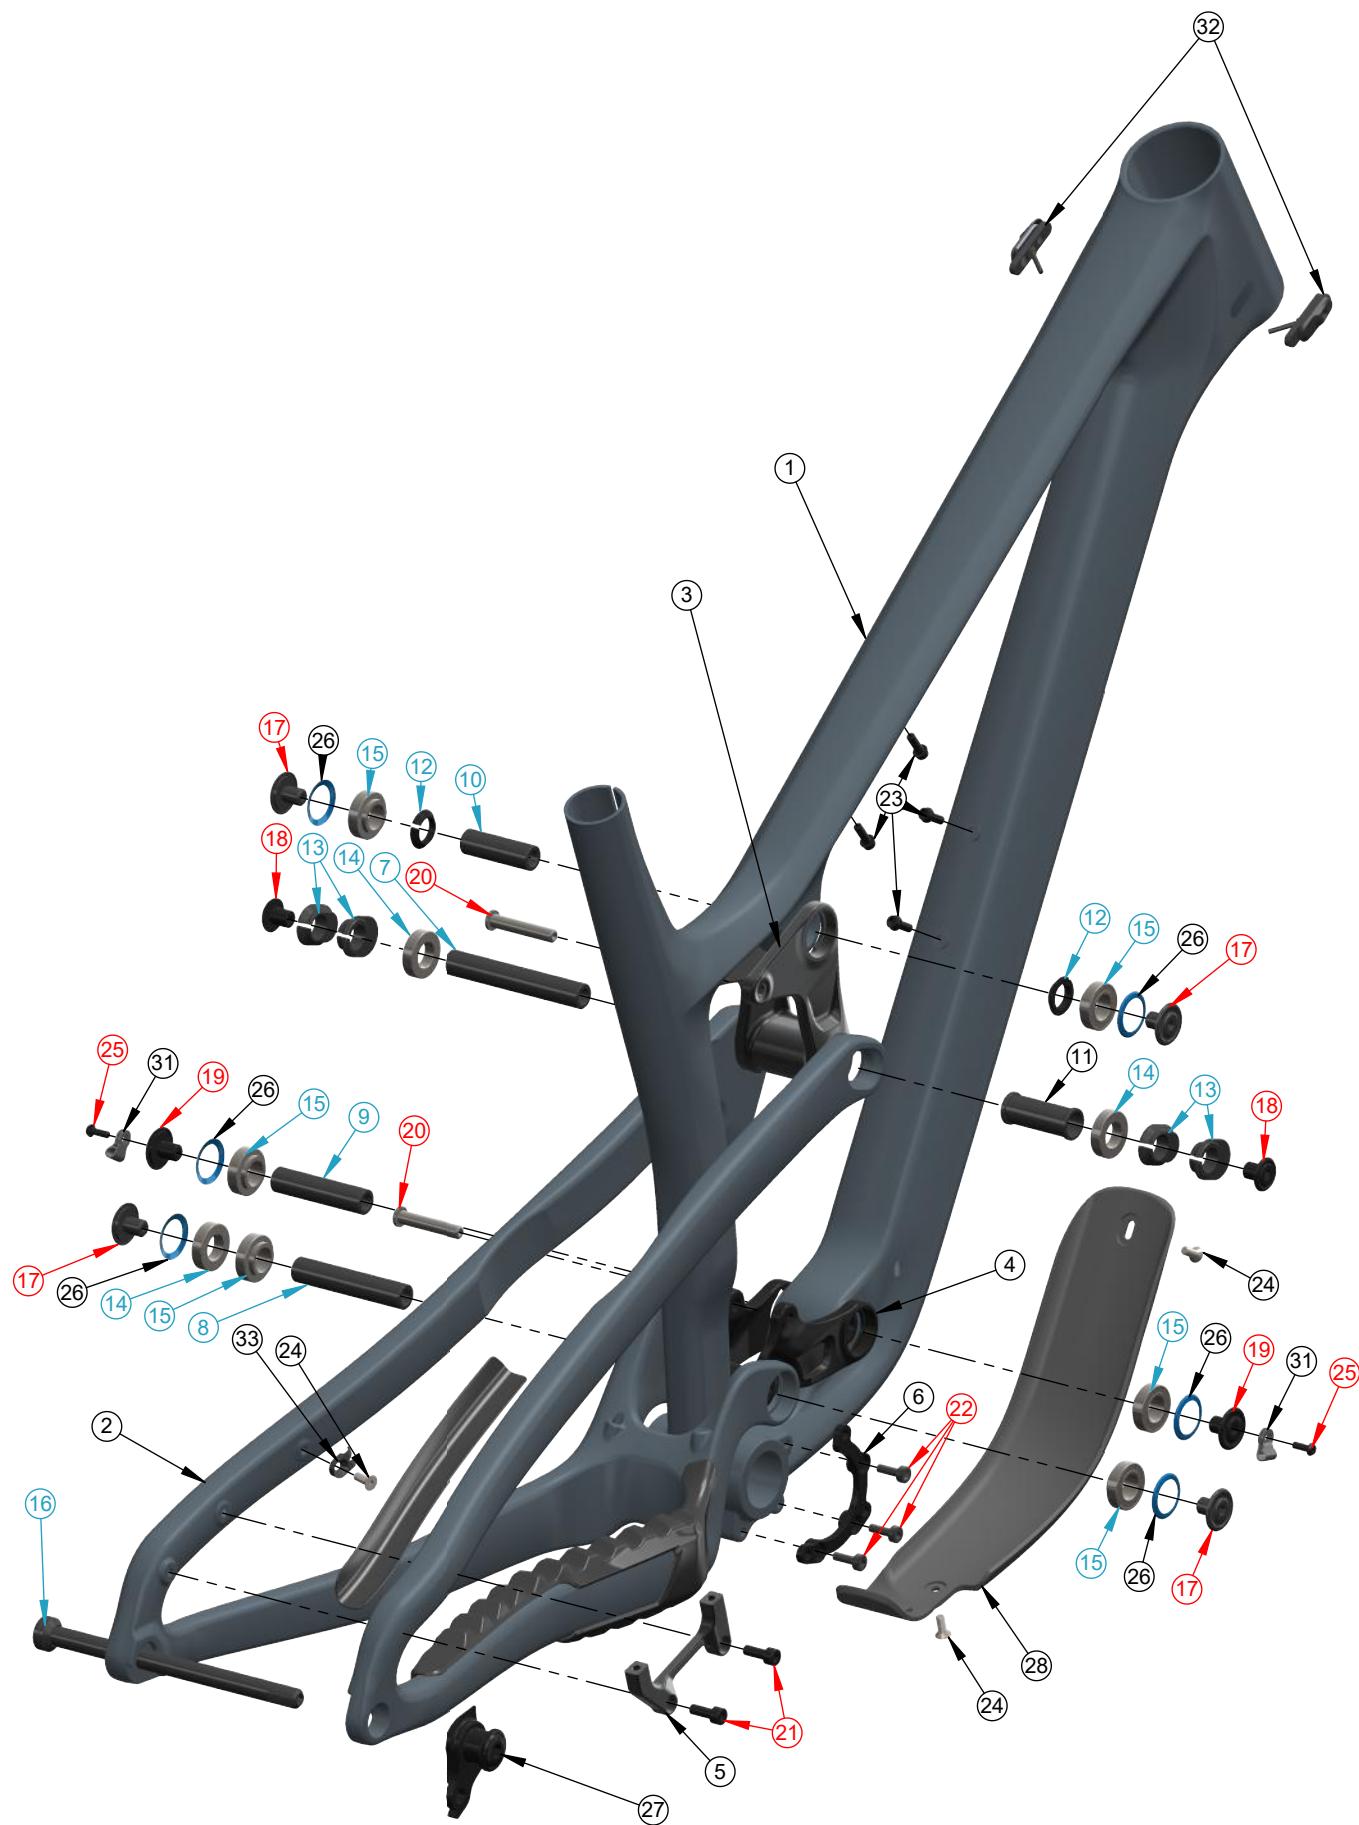

ITEM NO.	Part. No.	Part name	QTY.	Torque
1	001649	Front_triangle	1	
2	001575	Rear_triangle	1	
3	001689	Upper_link	1	
4	001698	Lower_link	1	
5	002448	Brake_adapter	1	
6	001857	ISCG05 mount	1	
7	001695	Axle_15x94mm_M10x1	1	
8	001750	Axle_15x76.5mm_M10x1	1	
9	001694	Axle_15x63mm_M10x1	1	
10	001693	Axle_15x47mm_M10x1	1	
11	001708	Spacer_15x19x46	1	
12	000604	Clamp_ring_15mm_axle	4	
13	001720	Flip_chip	4	
14	000006	Bearing_15x28x7_NoS61902-2RS	3	
15	000176	Bearing_15x28x7_flange_No61902	6	
16	001284	Propain_Sixpack_X12_axle_UDH	1	
17	000600	15mm_Axle_Cap	4	15 Nm
18	001626	10mm_clamp_Axle_Cap	2	15 Nm
19	001714	Bolt_M10x1x12_custom	2	15 Nm
20	000991	Bolt_M8x43_custom	2	15 Nm
21	001764	Bolt_M6x16_ISO4762	2	6 Nm
22	001538	Bolt_M6x16_DIN6912	3	6 Nm
23	001993	Bolt_M5x15_custom	4	3 Nm
24	000056	Bolt_M5x12_ISO10642	3	3 Nm
25	001715	Bolt_M4x12_ISO7380-1	2	0,5 Mm
26	000602	Dust_cap_seal	6	
27	001739	UDH hanger	1	20 Nm
28	001927	DT_protector	1	
29	002049	SS_protector	1	
30	002043	CS_protector	1	
31	001713	Action cable base	2	
32	002342	Cable_guide	2	
33	000057	Cable_guide_1	1	

○ Apply Grease

○ Use Loctite 243 on thread

PROPAIN